

## For Analog I/O, Digital I/O, &amp; Pulse/Frequency

**Overview .....** 1**Connections .....** 1

**Note:** DBK206 provides: P1, P2, and P3 connectors and corresponding screw-terminal blocks for use with DaqBook/2000 Series Devices, DaqBoard/2000 Series Boards, and cPCI DaqBoard/2000c Series Boards.



**This product is not used for LogBook applications.**


**Reference Notes:**

- ✦ In regard to calculating system power requirements refer to the *DBK Basics* section.
- ✦ Chapter 2 includes pinouts for P1, P2, P3, and P4. Refer to pinouts applicable to your system, as needed.
- ✦ For a quick comparison of all DBK200 Series boards, refer to the *DBK200 Series Matrix*. The matrix is located just before the DBK200 section.
- ✦ Refer to the *DaqBoard/2000 Series and cPCI DaqBoard/2000c Series User's Manual* (p/n 1033-0901) or the *DaqBook/2000 Series User's Manual* (p/n 1103-0901) for information pertaining to those products, as needed.

---

**Overview**

DaqBoard/2000 Series and cPCI DaqBoard/2000c Series boards communicate [external from the host PC] through a 100-pin P4 connector. The DBK206 provides a P1, P2, and P3 connector and corresponding screw-terminal blocks. P1 is used for ANALOG I/O, P2 for DIGITAL I/O, and P3 for PULSE/FREQUENCY (Digital and Counter/Timer) I/O.

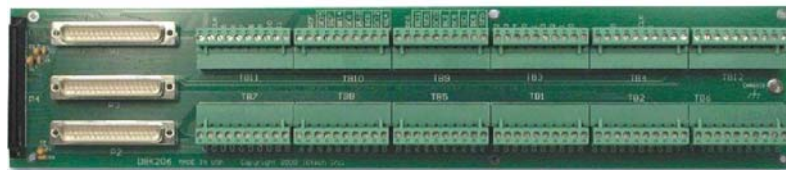

***DBK206, P4-to-P1/P2/P3 Adapter with Screw-Terminals***

**Note:** The P1, P2, and P3 connectors discussed in association with DaqBook/2000 Series devices DaqBoard/2000 Series boards and cPCI DaqBoard/2000c Series boards are subset connectors of the 100-pin P4 connector that is located on those boards. Chapter *System Connections and Pinouts*, includes pinouts for P1, P2, P3, and P4.




---

**Connections**

The DBK206 is suitable for both analog and digital expansion. Signal connection to a DaqBook/2000 Series device, DaqBoard/2000 Series board, or to a cPCI DaqBoard/2000c Series board can be made as follows:

- With cables connected to P1, P2, and P3 connectors, as applicable.
- With signal wires connected to the appropriate screw-terminal blocks (TB1 through TB12). Note that the DBK206 board's silkscreen clearly identifies all screw terminals.
- With a combination of the above two methods.


Regardless of which method is used, the DBK206 connects to the 100-pin P4 connector of a DaqBook/2000 Series device, DaqBoard/2000 Series board, or a cPCI DaqBoard/2000c Series board. The connection is made via a CA-195 cable. Note that DBK206 contains mounting holes that allow the board to be secured inside a user-provided enclosure (not shown).

| <b>CAUTION</b>  |  |
|---|--|
|  | <b>Turn off power to the host PC and externally connected equipment prior to connecting cables or signal lines to the DBK. Electric shock or damage to equipment can result even under low-voltage conditions.</b>   |
|  | <b>Take ESD precautions (packaging, proper handling, grounded wrist strap, etc.) Use care to avoid touching board surfaces and onboard components. Only handle boards by their edges (or ORBs, if applicable). Ensure boards do not come into contact with foreign elements such as oils, water, and industrial particulate.</b> |
|  | <b>Do not confuse connectors. Ensure that you only connect P1 I/Os to P1, P2 I/Os to P2, and P3 I/Os to P3. Improper connection may result in equipment damage.</b>  |

The illustrations and actual board silkscreen are the only references you should need to make proper connections.

A list of connection tips follows:

1. Ensure power is removed from the device(s) to be connected.
2. Observe ESD precautions when handling the board and making connections.
3. Do not make redundant connections. For example, for ANALOG IN you can use the P1 (DB37) connector or Terminal Blocks TB9 through TB12. You would not use both sets of ANALOG IN connectors.

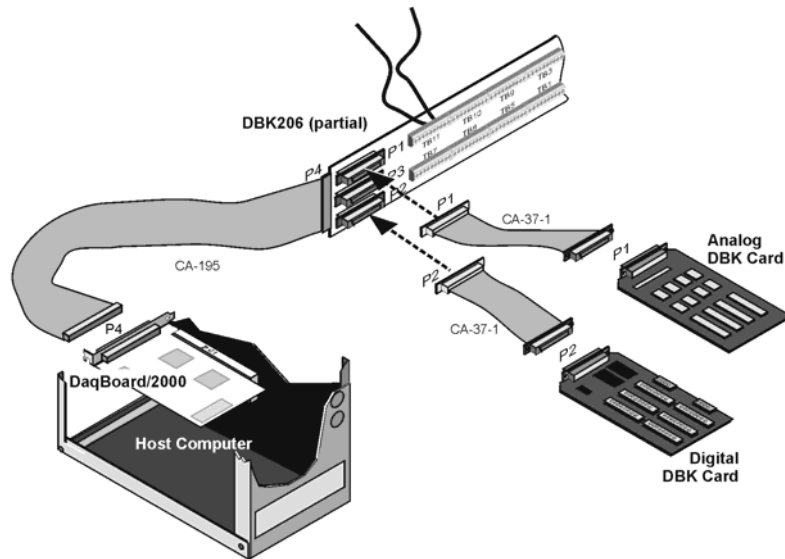

*Example of a DBK206 Connected to Analog and Digital DBK Cards Through P1 and P2, Respectively*




**Be sure to align the P4 orientation indicators (♦) prior to mating the P4 connectors.**

4. The DBK206 100-pin P4 connector connects to the DaqBoard/2000 Series P4 connector via a CA-195 Cable.

5. To obtain maximum protection from static, connect the CHASSIS terminal to earth ground.
6. For connections to DB37 connectors:
  - P1 connects to an analog DBK card or module's P1 connector via a CA-37 cable.
  - P2 connects to a Digital DBK card or module's P2 connector via a CA-37 cable.
  - P3 connects to a Pulse/Frequency DBK card or module's P3 connector via a CA-37 cable.
7. In regard to Screw-Terminal Block Connections:
  - When tightening terminal block screws, tighten them snug, but do not over-tighten.
  - The DBK206 includes 12 terminal blocks. Each block contains 10 screw-terminal connectors.
  - The DBK206 silkscreen provides labels for each terminal block (TB1 through TB12) and for each of the block's associated screw-terminals.
  - **TB9, TB10, TB11, and TB12** are used for **ANALOG IN** and provide a connection option to the **P1** (DB37) connector.
  - **TB5, TB6, TB7, and TB8** are used for **DIGITAL I/O** and provide a connection option to the **P2** (DB37) connector.
  - **TB1, TB2, TB3, and TB4** are used for **Pulse/Frequency/Digital I/O** and provide a connection to the **P3** (DB37) connector.
  - The following pages correlate the DBK206 terminal block connectors with the associated pins of the P1, P2, and P3 DB37 connectors. Note that the *System Connections and Pinouts* chapter contains additional pin-outs, and includes references to the 100-pin P4 connector.


**Correlation to P1 – TB11, TB10, TB9, and TB12 for Analog I/O.**

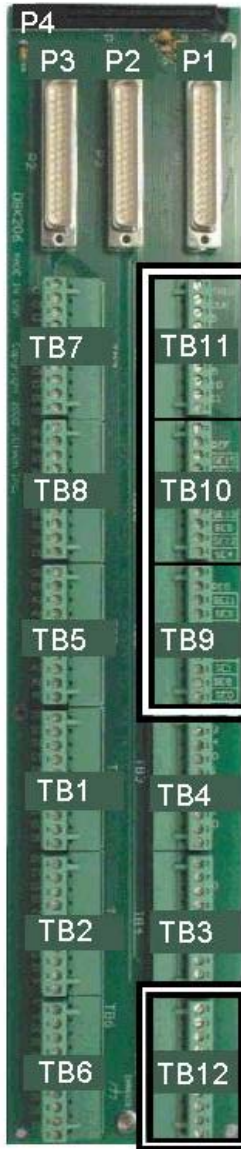

| <b>TB11</b> |    | <b>P1 Pin Number and Description</b>  |  |
|-------------|----|---|--|
| TTL TRIG    | 25 | TTL Trigger, Digital IN, External TTL Trigger Input                           |  |
| A/I CLK     | 20 | A/I Clock, External ADC Pacer Clock Input/<br>Internal ADC Pacer Clock Output |  |
| EXP 5       | 5  | Expansion 5. Digital OUT, external GAIN select bit 1                          |  |
| EXP 6       | 6  | Expansion 6. Digital OUT, external GAIN select bit 0                          |  |
| EXP 7       | 3  | Expansion 7. Digital OUT, external ADDRESS, select bit 3                      |  |
| EXP 8       | 22 | Expansion 8. Digital OUT, external ADDRESS, select bit 2                      |  |
| EXP 9       | 4  | Expansion 9. Digital OUT, external ADDRESS, select bit 1                      |  |
| EXP 10      | 23 | Expansion 10. Digital OUT, external ADDRESS, select bit 0                     |  |
| EXP 11      | 26 | Expansion 11. Simultaneous Sample and Hold (SSH)                              |  |
| AGND        | *  | Analog Common   |  |
| <b>TB10</b> |    | <b>P1 Pin Number and Description</b>  |  |
| SGND        | 19 | Signal Ground, Sense Common   |  |
| POSREF      | 9  | Positive Reference, Analog +5 V reference                                     |  |
| SE15        | 11 | CH 15 IN (Single-Ended Mode) / CH 7 LO IN (Differential Mode)                 |  |
| SE7         | 30 | CH 7 IN (Single-Ended Mode) / CH 7 HI IN (Differential Mode)                  |  |
| SE14        | 12 | CH 14 IN (Single-Ended Mode) / CH 6 LO IN (Differential Mode)                 |  |
| SE6         | 31 | CH 6 IN (Single-Ended Mode) / CH 6 HI IN (Differential Mode)                  |  |
| SE13        | 13 | CH 13 IN (Single-Ended Mode) / CH 5 LO IN (Differential Mode)                 |  |
| SE5         | 32 | CH 5 IN (Single-Ended Mode) / CH 5 HI IN (Differential Mode)                  |  |
| SE12        | 14 | CH 12 IN (Single-Ended Mode) / CH 4 LO IN (Differential Mode)                 |  |
| SE4         | 33 | CH 4 IN (Single-Ended Mode) / CH 4 HI IN (Differential Mode)                  |  |
| <b>TB9</b>  |    | <b>P1 Pin Number and Description</b>  |  |
| SGND        | 19 | Signal Ground, Sense Common   |  |
| NEGREF      | 8  | Negative Reference, Analog -5 V reference                                     |  |
| SE11        | 15 | CH 11 IN (Single-Ended Mode) / CH 3 LO IN (Differential Mode)                 |  |
| SE3         | 34 | CH 3 IN (Single-Ended Mode) / CH 3 HI IN (Differential Mode)                  |  |
| SE10        | 16 | CH 10 IN (Single-Ended Mode) / CH 2 LO IN (Differential Mode)                 |  |
| SE2         | 35 | CH 2 IN (Single-Ended Mode) / CH 2 HI IN (Differential Mode)                  |  |
| SE9         | 17 | CH 9 IN (Single-Ended Mode) / CH 1 LO IN (Differential Mode)                  |  |
| SE1         | 36 | CH 1 IN (Single-Ended Mode) / CH 1 HI IN (Differential Mode)                  |  |
| SE8         | 18 | CH 8 IN (Single-Ended Mode) / CH 0 LO IN (Differential Mode)                  |  |
| SE0         | 37 | CH 0 IN (Single-Ended Mode) / CH 0 HI IN (Differential Mode)                  |  |
| <b>TB12</b> |    | <b>P1 Pin Number and Description</b>  |  |
| AGND        | *  | Analog Common   |  |
| AGND        | *  | Analog Common   |  |
| AGND        | *  | Analog Common   |  |
| AGND        | *  | Analog Common   |  |
| AGND        | *  | Analog Common   |  |
| AGND        | *  | Analog Common   |  |
| + 15 V      | 21 | Expansion, +15 V Power  |  |
| - 15 V      | 2  | Expansion, -15 V Power  |  |
| AGND        | *  | Analog Common   |  |
| + 5 V       | 1  | Expansion, +5 V Power   |  |

\* Refer to Ground Correlation Tables in the *System Connections and Pinouts* chapter.


## Correlation to P2 – TB5, TB6, TB7, and TB8 for Digital I/O.

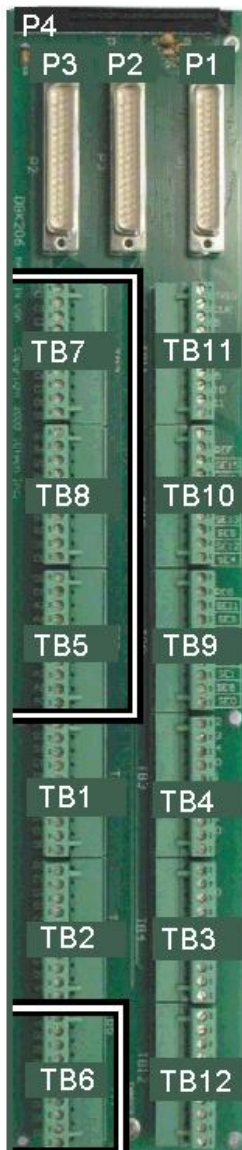

| TB7  |    | P2 Pin Number and Description   |  |
|------|----|---|--|
| C0   | 29 | Digital I/O: P2, Digital Port C, Bit 0; or P2 Expansion Data Bit 0        |  |
| C1   | 28 | Digital I/O: P2, Digital Port C, Bit 1; or P2 Expansion Data Bit 1        |  |
| C2   | 27 | Digital I/O: P2, Digital Port C, Bit 2; or P2 Expansion Data Bit 2        |  |
| C3   | 26 | Digital I/O: P2, Digital Port C, Bit 3; or P2 Expansion Data Bit 3        |  |
| C4   | 25 | Digital I/O: P2, Digital Port C, Bit 4; or P2 Expansion Data Bit 4        |  |
| C5   | 24 | Digital I/O: P2, Digital Port C, Bit 5; or P2 Expansion Data Bit 5        |  |
| C6   | 23 | Digital I/O: P2, Digital Port C, Bit 6; or P2 Expansion Data Bit 6        |  |
| C7   | 22 | Digital I/O: P2, Digital Port C, Bit 7; or P2 Expansion Data Bit 7        |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| TB8  |    | P2 Pin Number and Description   |  |
| B7   | 3  | Digital I/O: P2, Digital Port B, Bit 7; or P2 Expansion Address Bit 0 Out |  |
| B6   | 4  | Digital I/O: P2, Digital Port B, Bit 6; or P2 Expansion Address Bit 1 Out |  |
| B5   | 5  | Digital I/O: P2, Digital Port B, Bit 5; or P2 Expansion Address Bit 2 Out |  |
| B4   | 6  | Digital I/O: P2, Digital Port B, Bit 4; or P2 Expansion Address Bit 3 Out |  |
| B3   | 7  | Digital I/O: P2, Digital Port B, Bit 3; or P2 Expansion Address Bit 4 Out |  |
| B2   | 8  | Digital I/O: P2, Digital Port B, Bit 2; or P2 Expansion RESET Output      |  |
| B1   | 9  | Digital I/O: P2, Digital Port B, Bit 1; or P2 Expansion WRITE Output      |  |
| B0   | 10 | Digital I/O: P2, Digital Port B, Bit 0; or P2 Expansion READ Output       |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| TB5  |    | P2 Pin Number and Description   |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| A7   | 30 | Digital I/O: P2, Digital Port A, Bit 7; or P2 Expansion Data Bit 15       |  |
| A6   | 31 | Digital I/O: P2, Digital Port A, Bit 6; or P2 Expansion Data Bit 14       |  |
| A5   | 32 | Digital I/O: P2, Digital Port A, Bit 5; or P2 Expansion Data Bit 13       |  |
| A4   | 33 | Digital I/O: P2, Digital Port A, Bit 4; or P2 Expansion Data Bit 12       |  |
| A3   | 34 | Digital I/O: P2, Digital Port A, Bit 3; or P2 Expansion Data Bit 11       |  |
| A2   | 35 | Digital I/O: P2, Digital Port A, Bit 2; or P2 Expansion Data Bit 10       |  |
| A1   | 36 | Digital I/O: P2, Digital Port A, Bit 1; or P2 Expansion Data Bit 9        |  |
| A0   | 37 | Digital I/O: P2, Digital Port A, Bit 0; or P2 Expansion Data Bit 8        |  |
| TB6  |    | P2 Pin Number and Description   |  |
| +5 V | 18 | Expansion +5 V Power  |  |
| +5 V | 20 | Expansion +5 V Power  |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |
| DGND | *  | Digital Common  |  |

\* Refer to Ground Correlation Tables in the *System Connections and Pinouts* chapter.

## Correlation to P3 – TB1, TB2, TB3, and TB4 for Pulse/Frequency/Digital I/O.

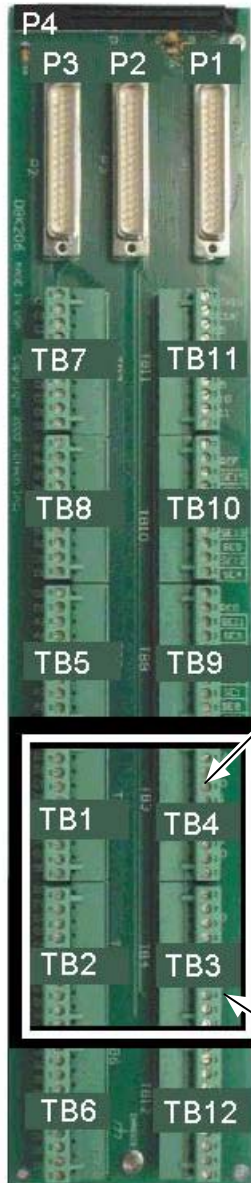

| <b>TB1</b> |    | <b>P3 Pin Number and Description</b>   |  |
|------------|----|--|--|
| D8         | 29 | P3 Digital Port Bit 8  |  |
| D9         | 28 | P3 Digital Port Bit 9  |  |
| D10        | 27 | P3 Digital Port Bit 10   |  |
| D11        | 26 | P3 Digital Port Bit 11   |  |
| D12        | 25 | P3 Digital Port Bit 12   |  |
| D13        | 24 | P3 Digital Port Bit 13   |  |
| D14        | 23 | P3 Digital Port Bit 14   |  |
| D15        | 22 | P3 Digital Port Bit 15   |  |
| DGND       | *  | Digital Common   |  |
| DGND       | *  | Digital Common   |  |
| <b>TB2</b> |    | <b>P3 Pin Number and Description</b>   |  |
| D0         | 10 | P3 Digital Port Bit 0  |  |
| D1         | 9  | P3 Digital Port Bit 1  |  |
| D2         | 8  | P3 Digital Port Bit 2  |  |
| D3         | 7  | P3 Digital Port Bit 3  |  |
| D4         | 6  | P3 Digital Port Bit 4  |  |
| D5         | 5  | P3 Digital Port Bit 5  |  |
| D6         | 4  | P3 Digital Port Bit 6  |  |
| D7         | 3  | P3 Digital Port Bit 7  |  |
| DGND       | *  | Digital Common   |  |
| +5V        | 20 | Expansion, +5 Volt Power   |  |
| <b>TB4</b> |    | <b>P3 Pin Number and Description</b>   |  |
| EXP 2      | 12 | Reserved   |  |
| EXP 3      | 13 | Reserved   |  |
| EXP 4      | 14 | Reserved   |  |
| TMR 0      | 15 | P3 Timer 0 Output  |  |
| TMR 1      | 16 | P3, Timer 1 Output   |  |
| CNT 3      | 35 | P3 Counter 3 Input   |  |
| CNT 2      | 17 | P3 Counter 2 Input   |  |
| CNT 1      | 36 | P3 Counter 1 Input   |  |
| CNT0       | 18 | P3 Counter 0 Input   |  |
| DGND       | *  | Digital Common   |  |
| <b>TB3</b> |    | <b>P3 Pin Number and Description</b>   |  |
| DAC0       | 34 | Analog Out; Analog DAC 0 Output  |  |
| AGND       | *  | Analog Common  |  |
| DAC2       | 32 | Analog Out; Analog DAC 2 Output  |  |
| AGND       | *  | Analog Common  |  |
| DAC1       | 33 | Analog Out; Analog DAC 1 Output  |  |
| A/O CLK    | 21 | Analog Out Clock; External DAC Pacer Clock Input/<br>Internal DAC Pacer Clock Output |  |
| DAC3       | 31 | Analog Out; Analog DAC 3 Output  |  |
| DGND       | *  | Digital Common   |  |
| +15 V      | 19 | Expansion, + 15 VDC  |  |
| -15 V      | 37 | Expansion, -15 VDC   |  |

\* Refer to Ground Correlation Tables in the *System Connections and Pinouts* chapter.